

BEST AVAILABLE COPY

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


<p>(51) International Patent Classification ⁶ : A61M 29/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/49928</p> <p>(43) International Publication Date: 7 October 1999 (07.10.99)</p>																				
<table style="width: 100%;"> <tr> <td style="width: 50%; vertical-align: top;"> <p>(21) International Application Number: PCT/US99/06659</p> <p>(22) International Filing Date: 26 March 1999 (26.03.99)</p> <p>(30) Priority Data:</p> <table style="width: 100%;"> <tr> <td style="width: 33%;">60/079,881</td> <td style="width: 33%;">30 March 1998 (30.03.98)</td> <td style="width: 33%;">US</td> </tr> <tr> <td>09/183,555</td> <td>29 October 1998 (29.10.98)</td> <td>US</td> </tr> </table> <p>(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Applications</p> <table style="width: 100%;"> <tr> <td style="width: 33%;">US</td> <td style="width: 33%;">60/079,881 (CON)</td> <td style="width: 33%;"></td> </tr> <tr> <td>Filed on</td> <td>30 March 1998 (30.03.98)</td> <td></td> </tr> <tr> <td>US</td> <td>09/183,555 (CON)</td> <td></td> </tr> <tr> <td>Filed on</td> <td>29 October 1998 (29.10.98)</td> <td></td> </tr> </table> <p>(71)(72) Applicant and Inventor: SHANLEY, John, F. [US/US]; 401 Camberly Way, Redwood City, CA 94061 (US).</p> <p>(74) Agent: PETERSON, James, W.; Burns, Doane, Swecker & Mathis, L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).</p> </td> <td style="width: 50%; vertical-align: top;"> <p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> </td> </tr> </table>			<p>(21) International Application Number: PCT/US99/06659</p> <p>(22) International Filing Date: 26 March 1999 (26.03.99)</p> <p>(30) Priority Data:</p> <table style="width: 100%;"> <tr> <td style="width: 33%;">60/079,881</td> <td style="width: 33%;">30 March 1998 (30.03.98)</td> <td style="width: 33%;">US</td> </tr> <tr> <td>09/183,555</td> <td>29 October 1998 (29.10.98)</td> <td>US</td> </tr> </table> <p>(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Applications</p> <table style="width: 100%;"> <tr> <td style="width: 33%;">US</td> <td style="width: 33%;">60/079,881 (CON)</td> <td style="width: 33%;"></td> </tr> <tr> <td>Filed on</td> <td>30 March 1998 (30.03.98)</td> <td></td> </tr> <tr> <td>US</td> <td>09/183,555 (CON)</td> <td></td> </tr> <tr> <td>Filed on</td> <td>29 October 1998 (29.10.98)</td> <td></td> </tr> </table> <p>(71)(72) Applicant and Inventor: SHANLEY, John, F. [US/US]; 401 Camberly Way, Redwood City, CA 94061 (US).</p> <p>(74) Agent: PETERSON, James, W.; Burns, Doane, Swecker & Mathis, L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).</p>	60/079,881	30 March 1998 (30.03.98)	US	09/183,555	29 October 1998 (29.10.98)	US	US	60/079,881 (CON)		Filed on	30 March 1998 (30.03.98)		US	09/183,555 (CON)		Filed on	29 October 1998 (29.10.98)		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(21) International Application Number: PCT/US99/06659</p> <p>(22) International Filing Date: 26 March 1999 (26.03.99)</p> <p>(30) Priority Data:</p> <table style="width: 100%;"> <tr> <td style="width: 33%;">60/079,881</td> <td style="width: 33%;">30 March 1998 (30.03.98)</td> <td style="width: 33%;">US</td> </tr> <tr> <td>09/183,555</td> <td>29 October 1998 (29.10.98)</td> <td>US</td> </tr> </table> <p>(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Applications</p> <table style="width: 100%;"> <tr> <td style="width: 33%;">US</td> <td style="width: 33%;">60/079,881 (CON)</td> <td style="width: 33%;"></td> </tr> <tr> <td>Filed on</td> <td>30 March 1998 (30.03.98)</td> <td></td> </tr> <tr> <td>US</td> <td>09/183,555 (CON)</td> <td></td> </tr> <tr> <td>Filed on</td> <td>29 October 1998 (29.10.98)</td> <td></td> </tr> </table> <p>(71)(72) Applicant and Inventor: SHANLEY, John, F. [US/US]; 401 Camberly Way, Redwood City, CA 94061 (US).</p> <p>(74) Agent: PETERSON, James, W.; Burns, Doane, Swecker & Mathis, L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).</p>	60/079,881	30 March 1998 (30.03.98)	US	09/183,555	29 October 1998 (29.10.98)	US	US	60/079,881 (CON)		Filed on	30 March 1998 (30.03.98)		US	09/183,555 (CON)		Filed on	29 October 1998 (29.10.98)		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>			
60/079,881	30 March 1998 (30.03.98)	US																				
09/183,555	29 October 1998 (29.10.98)	US																				
US	60/079,881 (CON)																					
Filed on	30 March 1998 (30.03.98)																					
US	09/183,555 (CON)																					
Filed on	29 October 1998 (29.10.98)																					

(54) Title: **EXPANDABLE MEDICAL DEVICE WITH DUCTILE HINGES**

(57) Abstract

An expandable tissue supporting device (20) of the present invention employs ductile hinges (32) at selected points in the expandable device. When expansion forces are applied to the device as a whole, the ductile hinges concentrate expansion stresses and strains in small well defined areas. The expandable medical device including ductile hinges provides the advantages of low expansion force requirements, relatively thick walls which are radio-opaque, improved crimping properties, high crush strength, reduced elastic recoil after implantation, and control of strain to a desired level. The expandable tissue supporting device includes a plurality of elongated beams arranged in a cylindrical device and connected together by a plurality of ductile hinges. Although many ductile hinge

configurations are possible, the ductile hinges preferably have a substantially constant hinge cross-sectional area which is smaller than a beam cross-sectional area such that as the device is expanded from a first diameter to a second diameter, the ductile hinges experience plastic deformation while the beams are not plastically deformed.

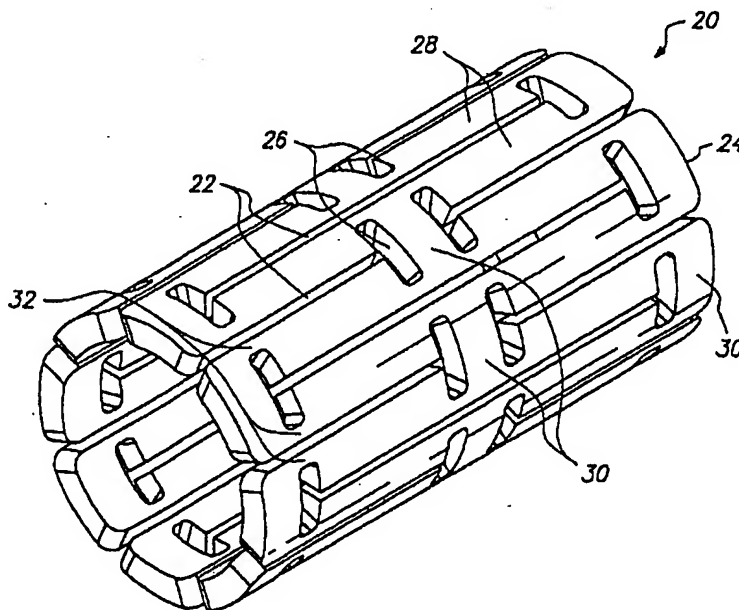

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

EXPANDABLE MEDICAL DEVICE WITH DUCTILE HINGES
BACKGROUND OF THE INVENTION

1. **Field of the Invention**

The present invention relates to tissue-supporting medical devices, and more particularly to expandable, non-removable devices that are implanted within a bodily lumen of a living animal or human to support the organ and maintain patency.

2. **Summary of the Related Art**

In the past, permanent or biodegradable devices have been developed for implantation within a body passageway to maintain patency of the passageway. These devices are typically introduced percutaneously, and transported transluminally until positioned at a desired location. These devices are then expanded either mechanically, such as by the expansion of a mandrel or balloon positioned inside the device, or expand themselves by releasing stored energy upon actuation within the body. Once expanded within the lumen, these devices, called stents, become encapsulated within the body tissue and remain a permanent implant.

Known stent designs include monofilament wire coil stents (U.S. Pat. No. 4,969,458); welded metal cages (U.S. Pat. Nos. 4,733,665 and 4,776,337); and, most prominently, thin-walled metal cylinders with axial slots formed around the circumference (U.S. Pat. Nos. 4,733,665, 4,739,762, and 4,776,337). Known construction materials for use in stents include polymers, organic fabrics and biocompatible metals, such as, stainless steel, gold, silver, tantalum, titanium, and shape memory alloys such as Nitinol.

-2-

U.S. Pat. Nos. 4,733,665, 4,739,762, and 4,776,337 disclose expandable and deformable interluminal vascular grafts in the form of thin-walled tubular members with axial slots allowing the members to be expanded radially outwardly into contact with a body passageway. After insertion, the tubular members are mechanically expanded beyond their elastic limit and thus permanently fixed within the body. The force required to expand these tubular stents is proportional to the thickness of the wall material in a radial direction. To keep expansion forces within acceptable levels for use within the body (e.g., 5 - 10 atm), these designs must use very thin-walled materials (e.g., stainless steel tubing with 0.0025 inch thick walls). However, materials this thin are not visible on conventional fluoroscopic and x-ray equipment and it is therefore difficult to place the stents accurately or to find and retrieve stents that subsequently become dislodged and lost in the circulatory system.

Further, many of these thin-walled tubular stent designs employ networks of long, slender struts whose width in a circumferential direction is two or more times greater than their thickness in a radial direction. When expanded, these struts are frequently unstable, that is, they display a tendency to buckle, with individual struts twisting out of plane. Excessive protrusion of these twisted struts into the bloodstream has been observed to increase turbulence, and thus encourage thrombosis. Additional procedures have often been required to attempt to correct this problem of buckled struts. For example, after initial stent implantation is determined to have caused buckling of struts, a second, high-pressure balloon (e.g., 12 to 18 atm) would be used to attempt to drive the twisted struts further into the lumen wall. These secondary procedures can be dangerous to the patient due to the risk of collateral damage to the lumen wall.

Many of the known stents display a large elastic recovery, known in the field as "recoil," after expansion inside a lumen. Large recoil necessitates over-expansion of the stent during implantation to achieve the desired final diameter. Over-expansion is potentially destructive to the lumen tissue. Known

-3-

stents of the type described above experience recoil of up to about 6 to 12% from maximum expansion.

Large recoil also makes it very difficult to securely crimp most known stents onto delivery catheter balloons. As a result, slippage of stents on balloons during interlumenal transportation, final positioning, and implantation has been an ongoing problem. Many ancillary stent securing devices and techniques have been advanced to attempt to compensate for this basic design problem. Some of the stent securing devices include collars and sleeves used to secure the stent onto the balloon.

Another problem with known stent designs is non-uniformity in the geometry of the expanded stent. Non-uniform expansion can lead to non-uniform coverage of the lumen wall creating gaps in coverage and inadequate lumen support. Further, over expansion in some regions or cells of the stent can lead to excessive material strain and even failure of stent features. This problem is potentially worse in low expansion force stents having smaller feature widths and thicknesses in which manufacturing variations become proportionately more significant. In addition, a typical delivery catheter for use in expanding a stent includes a balloon folded into a compact shape for catheter insertion. The balloon is expanded by fluid pressure to unfold the balloon and deploy the stent. This process of unfolding the balloon causes uneven stresses to be applied to the stent during expansion of the balloon due to the folds causing the problem non-uniform stent expansion.

U.S. Pat. No. 5,545,210 discloses a thin-walled tubular stent geometrically similar to those discussed above, but constructed of a nickel-titanium shape memory alloy ("Nitinol"). This design permits the use of cylinders with thicker walls by making use of the lower yield stress and lower elastic modulus of martensitic phase Nitinol alloys. The expansion force required to expand a Nitinol stent is less than that of comparable thickness stainless steel stents of a conventional design. However, the "recoil" problem after expansion is

-4-

significantly greater with Nitinol than with other materials. For example, recoil of a typical design Nitinol stent is about 9%. Nitinol is also more expensive, and more difficult to fabricate and machine than other stent materials, such as stainless steel.

All of the above stents share a critical design property: in each design, the features that undergo permanent deformation during stent expansion are prismatic, i.e., the cross sections of these features remain constant or change very gradually along their entire active length. To a first approximation, such features deform under transverse stress as simple beams with fixed or guided ends: essentially, the features act as leaf springs. These leaf spring like structures are ideally suited to providing large amounts of elastic deformation before permanent deformation commences. This is exactly the opposite of ideal stent behavior. Further, the force required to deflect prismatic stent struts in the circumferential direction during stent expansion is proportional to the square of the width of the strut in the circumferential direction. Expansion forces thus increase rapidly with strut width in the above stent designs. Typical expansion pressures required to expand known stents are between about 5 and 10 atmospheres. These forces can cause substantial damage to tissue if misapplied.

FIG. 1 shows a typical prior art "expanding cage" stent design. The stent 10 includes a series of axial slots 12 formed in a cylindrical tube 14. Each axial row of slots 12 is displaced axially from the adjacent row by approximately half the slot length providing a staggered slot arrangement. The material between the slots 12 forms a network of axial struts 16 joined by short circumferential links 18. The cross section of each strut 16 remains constant or varies gradually along the entire length of the strut and thus the rectangular moment of inertia and the elastic and plastic section moduli of the cross section also remain constant or vary gradually along the length of the strut. Such a strut 16 is commonly referred to as a prismatic beam. Struts 16 in this type of design are typically 0.005 to 0.006 inches (0.127 - 0.1524 mm) wide in the circumferential direction. Strut

-5-

thicknesses in the radial direction are typically about 0.0025 inches (0.0635 mm) or less to keep expansion forces within acceptable levels. However, most stent materials must be approximately 0.005 inches (0.127 mm) thick for good visibility on conventional fluoroscopic equipment. This high ratio of strut width to thickness, combined with the relatively high strut length and the initial curvature of the stent tubing combine to cause the instability and bucking often seen in this type of stent design. When expanded, the stent structure of FIG. 1 assumes the roughly diamond pattern commonly seen in expanded sheet metal.

Another stent described in PCT publication number WO 96/29028 uses struts with relatively weak portions of locally-reduced cross sections which on expansion of the stent act to concentrate deformation at these areas. However, as discussed above non-uniform expansion is even more of a problem when smaller feature widths and thicknesses are involved because manufacturing variations become proportionately more significant. The locally-reduced cross section portions described in this document are formed by pairs of circular holes. The shape of the locally-reduced cross section portions undesirably concentrates the plastic strain at the narrowest portion. This concentration of plastic strain without any provision for controlling the level of plastic strain makes the stent highly vulnerable to failure.

In view of the drawbacks of the prior art stents, it would be advantageous to be able to expand a stent with an expansion force at a low level independent of choice of stent materials, material thickness, or strut dimensions.

It would further be advantageous to have a tissue-supporting device that permits a choice of material thickness that could be viewed easily on conventional fluoroscopic equipment for any material.

It would also be advantageous to have a tissue-supporting device that is inherently stable during expansion, thus eliminating buckling and twisting of structural features during stent deployment.

-6-

It would also be desirable to control strain to a desired level which takes advantage of work hardening without approaching a level of plastic strain at which failure may occur.

In addition, it would be advantageous to have a tissue-supporting device with minimal elastic recovery, or "recoil" of the device after expansion.

It would be advantageous to have a tissue supporting device that can be securely crimped to the delivery catheter without requiring special tools, techniques, or ancillary clamping features.

It would further be advantageous to have a tissue-supporting device that has improved resistance to compressive forces (improved crush strength) after expansion.

It would also be advantageous to have a tissue-supporting device that achieves all the above improvements with minimal foreshortening of the overall stent length during expansion.

SUMMARY OF THE INVENTION

The present invention addresses several important problems in expandable medical device design including: high expansion force requirements; lack of radio-opacity in thin-walled stents; buckling and twisting of stent features during expansion; poor crimping properties; and excessive elastic recovery ("recoil") after implantation. The invention also provides benefits of improved resistance to compressive forces after expansion, control of the level of plastic strain, and low axial shortening during expansion. Some embodiments of the invention also provide improved uniformity of expansion by limiting a maximum geometric deflection between struts. The invention may also incorporate sites for the inclusion of beneficial agent delivery.

The invention involves the incorporation of stress/strain concentration features or "ductile hinges" at selected points in the body of an expandable cylindrical medical device. When expansion forces are applied to the device as a

-7-

whole, these ductile hinges concentrate expansion stresses and strains in small, well-defined areas while limiting strut deflection and plastic strain to specified levels.

In accordance with one aspect of the present invention, an expandable medical device includes a plurality of elongated beams having a substantially constant beam cross sectional area along a beam length. The plurality of elongated beams are joined together to form a substantially cylindrical device which is expandable from a cylinder having a first diameter to a cylinder having a second diameter. A plurality of ductile hinges connect the plurality of beams together in the substantially cylindrical device. The ductile hinges have a substantially constant hinge cross sectional area along a substantial portion of a hinge length. The hinge cross sectional area is smaller than the beam cross sectional area such that as the device is expanded from the first diameter to the second diameter the ductile hinges experience plastic deformation while the beams are not plastically deformed.

In accordance with a further aspect of the invention, an expandable medical device includes a cylindrical tube, and a plurality of axial slots formed in the cylindrical tube in a staggered arrangement to define a network of elongated struts, wherein each of the elongated struts are axially displaced from adjacent struts. A plurality of ductile hinges are formed between the elongated struts. The ductile hinges allow the cylindrical tube to be expanded or compressed from a first diameter to a second diameter by deformation of the ductile hinges. The ductile hinges are asymmetrically configured to reach a predetermined strain level upon a first percentage expansion and to reach the predetermined strain level upon a second percentage of compression, wherein the first percentage is larger than the second percentage.

In accordance with another aspect of the present invention, an expandable medical device includes a plurality of elongated beams having a substantially constant beam cross sectional area along a beam length. A plurality of ductile

-8-

hinges connect the plurality of beams together in a substantially cylindrical device which is expandable or compressible from a first diameter to a second diameter by plastic deformation of the ductile hinges. A plurality of deflection limiting members are positioned at a plurality of the ductile hinges which limit the deflection at the ductile hinges.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in greater detail with reference to the preferred embodiments illustrated in the accompanying drawings, in which like elements bear like reference numerals, and wherein:

FIG. 1 is an isometric view of a prior art tissue-supporting device;

FIG. 2 is an isometric view of a tissue-supporting device in accordance with one embodiment of the invention;

FIGS. 3a-d are perspective views of ductile hinges according to several variations of the invention;

FIG. 3e is a side view of another embodiment of a ductile hinge;

FIGS. 4a and 4b are an isometric view and an enlarged side view of a tissue-supporting device in accordance with an alternative embodiment of the invention;

FIGS. 5a-c are perspective, side, and cross-sectional views of an idealized ductile hinge for purposes of analysis;

FIG. 5d is a stress/strain curve for the idealized ductile hinge;

FIGS. 6 is a perspective view of a simple beam for purposes of calculation;

FIG. 7 is a moment verses curvature graph for a rectangular beam;

FIG. 8 is an enlarged side view of a bent ductile hinge;

FIGS. 9a and 9b are enlarged side views of ductile hinges in initial and expanded positions with shortened struts to illustrate axial contraction relationships; and

FIG. 10 is a side view of a portion of an alternative embodiment of a tissue supporting device having a high-crush-strength and low-recoil.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 2 shows one embodiment of an expandable tissue supporting device 20 in accordance with the present invention. The tissue supporting device 20 includes a series of axial slots 22 formed in a cylindrical tube 24. Each axial slot 22 is displaced axially from the slots in adjacent rows of slots by approximately half the slot length resulting in a staggered slot arrangement. The offset between adjacent rows of slots results in alternate rows of slots which extend to the ends of the cylindrical tube 24. At each interior end of each of the axial slots 22 a circumferential slot 26 is formed. The material between the slots 22 forms a network of axial struts 28 extending substantially parallel to an axis of the tube 24. The axial struts 28 are joined by short circumferential links 30. The circumferential links 30 are positioned at both the interior of the cylindrical tube and at the ends of the cylindrical tube. The cross section (and rectangular moment of inertia) of each of the struts 28 is not constant along the length of the strut. Rather, the strut cross section changes abruptly at both ends of each strut 28 at the location of the circumferential slots 26. The struts 28 are thus not prismatic. Each individual strut 28 is linked to the rest of the structure through a pair of reduced sections 32, one at each end, which act as stress/strain concentration features. The reduced sections 32 of the struts function as hinges in the cylindrical structure. Since the stress/strain concentration features 32 are designed to operate into the plastic deformation range of generally ductile materials, they are referred to as ductile hinges. Such features are also commonly referred to as "Notch Hinges" or "Notch Springs" in ultra-precision mechanism design, where they are used exclusively in the elastic range.

With reference to the drawings and the discussion, the *width* of any feature is defined as its dimension in the circumferential direction of the cylinder. The

-10-

length of any feature is defined as its dimension in the axial direction of the cylinder. The *thickness* of any feature is defined as the wall thickness of the cylinder.

The presence of the ductile hinges 32 allows all of the remaining features in the tissue supporting device to be increased in width or the circumferentially oriented component of their respective rectangular moments of inertia - thus greatly increasing

the strength and rigidity of these features. The net result is that elastic, and then plastic deformation commence and propagate in the ductile hinges 32 before other structural elements of the device undergo any significant elastic deformation. The force required to expand the tissue supporting device 20 becomes a function of the geometry of the ductile hinges 32, rather than the device structure as a whole, and arbitrarily small expansion forces can be specified by changing hinge geometry for virtually any material wall thickness. In particular, wall thicknesses great enough to be visible on a fluoroscope can be chosen for any material of interest.

In order to get minimum recoil, the ductile hinges 32 should be designed to operate well into the plastic range of the material, and relatively high local strain-curvatures are developed. When these conditions apply, elastic curvature is a very small fraction of plastic or total curvature, and thus when expansion forces are relaxed, the percent change in hinge curvature is very small. When incorporated into a strut network designed to take maximum advantage of this effect, the elastic springback, or "recoil," of the overall stent structure is minimized.

In the embodiment of FIG. 2, it is desirable to increase the width of the individual struts 28 between the ductile hinges 32 to the maximum width that is geometrically possible for a given diameter and a given number of struts arrayed around that diameter. The only geometric limitation on strut width is the minimum practical width of the slots 22 which is about 0.002 inches (0.0508 mm) for laser machining. Lateral stiffness of the struts 28 increases as the cube of strut

-11-

width, so that relatively small increases in strut width significantly increase strut stiffness. The net result of inserting ductile hinges 32 and increasing strut width is that the struts 28 no longer act as flexible leaf springs, but act as essentially rigid beams between the ductile hinges. All radial expansion or compression of the cylindrical tissue supporting device 20 is accommodated by mechanical strain in the hinge features 32, and yield in the hinge commences at very small overall radial expansion or compression.

Yield in ductile hinges at very low gross radial deflections also provides the superior crimping properties displayed by the ductile hinge-based designs. When a tissue supporting device is crimped onto a folded catheter balloon, very little radial compression of the device is possible since the initial fit between balloon and device is already snug. Most stents simply rebound elastically after such compression, resulting in very low clamping forces and the attendant tendency for the stent to slip on the balloon. Ductile hinges, however, sustain significant plastic deformation even at the low deflections occurring during crimping onto the balloon, and therefore a device employing ductile hinges displays much higher clamping forces. The ductile hinge designs according to the present invention may be securely crimped onto a balloon of a delivery catheter by hand or by machine without the need for auxiliary retaining devices commonly used to hold known stents in place.

The geometric details of the stress/strain concentration features or ductile hinges 32 can be varied greatly to tailor the exact mechanical expansion properties to those required in a specific application. The most obvious and straightforward ductile hinges are formed by slots or notches with rounded roots, as in FIGS. 3a and 3c. Since the laser beams often used to fabricate these features are themselves round, slots or notches with circular roots are also among the easiest to fabricate.

FIG. 3a shows a ductile hinge 36 formed by a pair of opposed circular grooves 38, 40. According to this embodiment the circumferential slot 26 has semicircular ends 38 having a radius of curvature r . Outer semicircular grooves

-12-

40 opposed the semicircular ends 38 and also have a radius of curvature r . FIG. 3c shows another ductile hinge 54 formed by a parabolic groove 56.

Generally, the ductile hinges 36 of the embodiment of FIG. 3a formed between pairs of concave curves 38, 40 have a minimum width along a line connecting their respective centers of curvature. When the struts connected by the ductile hinge are moved apart or together, plastic deformation is highly concentrated in a region immediately adjacent to the plane that bisects the hinge at this narrow point.

For smaller deflection, this very high strain concentration at the bisecting plane is acceptable, and in some cases, useful. For stent crimping purposed, for example, it is desirable to generate relatively large plastic deformations at very small deflection angles.

As a practical matter, however, strut deflection angles for device *expansion* are often in the 25° to 45° range. At these angles, strain at the root or bisecting plane of concave ductile hinge features can easily exceed the 50 to 60% elongation-to-failure of 316L stainless steel, one of the most ductile stent materials. Deflection limiting features which will be described further below limit the *geometric* deflection of struts, but these features do not in themselves affect the propagation pattern of plastic deformation in a given ductile hinge design. For concave ductile hinges at large bend angles, very high strain concentrations remain. Scanning electron micrographs have confirmed this analysis.

In many engineering applications, it is desirable to limit the amount of strain, or "cold-work," in a material to a specified level in order to optimize material properties and to assure safe operation. For example, in medical applications it is desirable to limit the amount of cold-work in 316L stainless steel to about 30%. At this level, the strength of the material is increased, while the material strain is still well below the failure range. Ideally, therefore, a safe and effective ductile hinge should not simply limit gross deflection, but reliably limit *material strain* to a specified level.

-13-

FIG. 3b shows a simple ductile hinge design that allows material strain to be limited to some specified level. The ductile hinge of FIG. 3b is formed by a rectangular circumferential groove 46 with filleted corners 48 on one side of a strut, the opposite side 50 of the strut remaining straight. The ductile hinges 44 are substantially rectangular sections between the ends of the groove 46 and the side walls 50.

One of the key concepts in FIG. 3b is that the ductile hinge 44 has a constant or substantially constant width along at least a portion of its total length. In this configuration, there is no local minimum width along the ductile hinge axis, as there is with pairs of concave roots. There is therefore no point concentration of stresses and strains along the length of the ductile hinge beam during stent expansion. In particular, maximum tensile and compressive strains will be distributed evenly along the upper and lower surfaces of the hinge 44 during stent expansion. With the gross bend angle limited by mechanical stops, which are described below in detail, the maximum *material strain* (at the hinge surfaces) can therefore be reliably limited by adjusting the initial length of the ductile hinge over which the total elongation is distributed.

FIG. 3d shows a ductile hinge 60 in a cylindrical wire 62 for incorporating into a wire-form tissue-supporting device. The ductile hinge 60 is formed by a reduced diameter portion of the wire 62. Again, it is important that the ductile hinge have a substantially constant width over a portion of its length in order to provide strain control. Preferably, the ductile hinge is prismatic over a portion of its length. Maximum material strain can be varied by adjusting the hinge length. The ductile hinges of the present invention have a constant or substantially constant width over at least 1/3 of the ductile hinge length, and preferably over at least 1/2 of the ductile hinge length.

FIG. 3e shows an asymmetric ductile hinge 63 that produces different strain versus deflection-angle functions in expansion and compression. Each of the ductile hinges 64 is formed between a convex surface 68 and a concave surface 69.

-14-

The ductile hinge 64 according to a preferred embodiment essentially takes the form of a small, prismatic curved beam having a substantially constant cross section. However, a thickness of the curved ductile hinge 64 may vary somewhat as long as the ductile hinge width remains constant along a portion of the hinge length. The width of the curved beam is measure along the radius of curvature of the beam. This small curved beam is oriented such that the smaller *concave* surface 69 is placed in tension in the device *crimping* direction, while the larger *convex* surface 68 of the ductile hinges is placed in tension in the device *expansion* direction. Again, there is no local minimum width of the ductile hinge 64 along the (curved) ductile hinge axis, and no concentration of material strain. During device expansion tensile strain will be distributed along the convex surface 68 of the hinge 64 and maximum expansion will be limited by the angle of the walls of the concave notch 69 which provide a geometric deflection limiting feature. Maximum tensile strain can therefore be reliably limited by adjusting the initial length of the convex arc shaped ductile hinge 64 over which the total elongation is distributed.

The ductile hinges illustrated in FIGS. 3a-e are examples of different structures that will function as a stress/strain concentrator. Many other stress/strain concentrator configurations may also be used as the ductile hinges in the present invention. The ductile hinges according to the present invention generally include an abrupt change in width of a strut that functions to concentrate stresses and strains in the narrower section of the strut. These ductile hinges also generally include features to limit mechanical deflection of attached struts and features to control material strain during large strut deflections. Although the ductile hinges have been illustrated in FIG. 2 as positioned at the ends of each of the axial slots 22, they may also be positioned at other locations in other designs without departing from the present invention.

An alternative embodiment of a tissue supporting device 80 is illustrated in FIG. 4a and in the enlarged side view of FIG. 4b. The tissue supporting device 80

-15-

includes a plurality of cylindrical tubes 82 connected by S-shaped bridging elements 84. The bridging elements 84 allow the tissue supporting device to bend axially when passing through the tortuous path of the vasculature to the deployment site and allow the device to bend when necessary to match the curvature of a lumen to be supported. The S-shaped bridging elements 84 provide improved axial flexibility over prior art devices due to the thickness of the elements in the radial direction which allows the width of the elements to be relatively small without sacrificing radial strength. For example, the width of the bridging elements 84 may be about 0.0012 - 0.0013 inches (0.0305 - 0.0330 mm). Each of the cylindrical tubes 82 has a plurality of axial slots 86 extending from an end surface of the cylindrical tube toward an opposite end surface. A plurality of axial struts 88 having ductile hinges 90 are formed between the axial slots 86. The ductile hinges 90 are formed by circumferential slots 92 formed at the interior ends of the axial slots 86 and opposed notches 94.

The notches 94 each have two opposed angled walls 96 which function as a stop to limit geometric deflection of the ductile hinge, and thus limit maximum device expansion. As the cylindrical tubes 82 are expanded and bending occurs at the ductile hinges 90, the angled side walls 96 of the notches 94 move toward each other. Once the opposite side walls 96 of a notch come into contact with each other, they resist further expansion of the particular ductile hinge causing further expansion to occur at other sections of the tissue supporting device. This geometric deflection limiting feature is particularly useful where uneven expansion is caused by either variations in the tissue supporting device 80 due to manufacturing tolerances or uneven balloon expansion.

The tissue supporting device 20, 80 according to the present invention may be formed of any ductile material, such as steel, gold, silver, tantalum, titanium, Nitinol, other shape memory alloys, other metals, or even some plastics. One preferred method for making the tissue supporting device 20, 80 involves forming a cylindrical tube and then laser cutting the slots 22, 26, 86, 92 and notches 94

-16-

into the tube. Alternatively, the tissue supporting device may be formed by electromachining, chemical etching followed by rolling and welding, or any other known method.

The design and analysis of stress/strain concentration for ductile hinges, and stress/strain concentration features in general, is complex. For example, the stress concentration factor for the simplified ductile hinge geometry of FIG. 3a can be calculated and is given by the following expression where D is the width of the struts 28, h is the height of the circular grooves 38, 40, and r is the radius of curvature of the grooves. For purposes of this example the ratio of h/r is taken to be 4. However, other ratios of h/r can also be implemented successfully.

$$K = 4.935 - 7.586 \left(\frac{2h}{D} \right) + 0.515 \left(\frac{2h}{D} \right)^2 + 0.432 \left(\frac{2h}{D} \right)^3$$

The stress concentration factors are generally useful only in the linear elastic range. Stress concentration patterns for a number of other geometries can be determined through photoelastic measurements and other experimental methods. Stent designs based on the use of stress/strain concentration features, or ductile hinges, generally involve more complex hinge geometries and operate in the non-linear elastic and plastic deformation regimes.

The general nature of the relationship among applied forces, material properties, and ductile hinge geometry can be more easily understood through analysis of an idealized hinge 66 as shown in FIGS. 5a-5c. The hinge 66 is a simple beam of rectangular cross section having a width h, length L and thickness b. The idealized hinge 66 has elastic-ideally-plastic material properties which are characterized by the ideal stress/strain curve of FIG. 5d. It can be shown that the

-17-

"plastic" or "ultimate bending moment" for such a beam is given by the expression:

$$M_p \equiv M_{ult} = \delta_{yp} \frac{bh^2}{4}$$

Where b corresponds to the cylindrical tube wall thickness, h is the circumferential width of the ductile hinge, and δ_{yp} is the yield stress of the hinge material.

Assuming only that expansion pressure is proportional to the plastic moment, it can be seen that the required expansion pressure to expand the tissue supporting device increases *linearly* with wall thickness b and as the *square* of ductile hinge width h. It is thus possible to compensate for relatively large changes in wall thickness b with relatively small changes in hinge width h. While the above idealized case is only approximate, empirical measurements of expansion forces for different hinge widths in several different ductile hinge geometries have confirmed the general form of this relationship. Accordingly, for different ductile hinge geometries it is possible to increase the thickness of the tissue supporting device to achieve radiopacity while compensating for the increased thickness with a much smaller decrease in hinge width.

Ideally, the stent wall thickness b should be as thin as possible while still providing good visibility on a fluoroscope. For most stent materials, including stainless steel, this would suggest a thickness of about 0.005 - 0.007 inches (0.127 - 0.178 mm) or greater. The inclusion of ductile hinges in a stent design can lower expansion forces/pressures to very low levels for any material thickness of interest. Thus ductile hinges allow the construction of optimal wall thickness tissue supporting devices at expansion force levels significantly lower than current non-visible designs.

The expansion forces required to expand the tissue supporting device 20 according to the present invention from an initial condition illustrated in FIG. 2 to an expanded condition is between 1 and 5 atmospheres, preferably between 2 and

-18-

3 atmospheres. The expansion may be performed in a known manner, such as by inflation of a balloon or by a mandrel. The tissue supporting device 20 in the expanded condition has a diameter which is preferably up to three times the diameter of the device in the initial unexpanded condition.

Many tissue supporting devices fashioned from cylindrical tubes comprise networks of long, narrow, prismatic beams of essentially rectangular cross section as shown in FIG. 6. These beams which make up the known tissue supporting devices may be straight or curved, depending on the particular design. Known expandable tissue supporting devices have a typical wall thickness b of 0.0025 inches (0.0635 mm), and a typical strut width h of 0.005 to 0.006 inches (0.127 - 0.1524 mm). The ratio of $b:h$ for most known designs is 1:2 or lower. As b decreases and as the beam length L increases, the beam is increasingly likely to respond to an applied bending moment M by buckling, and many designs of the prior art have displayed this behavior. This can be seen in the following expression for the "critical buckling moment" for the beam of FIG. 6.

$$M_{crit} = \frac{\pi b^3 h \sqrt{EG(1 - 0.63 \frac{b}{h})}}{6L}$$

Where: E = Modulus of Elasticity

G = Shear Modulus

By contrast, in a ductile hinge based design according to the present invention, only the hinge itself deforms during expansion. The typical ductile hinge 32 is not a long narrow beam as are the struts in the known stents. Wall thickness of the present invention may be increased to 0.005 inches (0.127 mm) or greater, while hinge width is typically 0.002 - 0.003 inches (0.0508 - 0.0762 mm), preferably 0.0025 inches (0.0635 mm) or less. Typical hinge length, at 0.002 to 0.005 inches (0.0508 - 0.127 mm), is more than an order of magnitude less than typical strut length. Thus, the ratio of $b:h$ in a typical ductile hinge 32 is 2:1 or greater. This is an inherently stable ratio, meaning that the plastic moment for

-19-

such a ductile hinge beam is much lower than the critical buckling moment M_{crit} , and the ductile hinge beam deforms through normal strain-curvature. Ductile hinges 32 are thus not vulnerable to buckling when subjected to bending moments during expansion of the tissue supporting device 20.

To provide optimal recoil and crush-strength properties, it is desirable to design the ductile hinges so that relatively large strains, and thus large curvatures, are imparted to the hinge during expansion of the tissue supporting device.

Curvature is defined as the reciprocal of the radius of curvature of the neutral axis of a beam in pure bending. A larger curvature during expansion results in the elastic curvature of the hinge being a small fraction of the total hinge curvature. Thus, the gross elastic recoil of the tissue supporting device is a small fraction of the total change in circumference. It is generally possible to do this because common stent materials, such as 316L Stainless Steel have very large elongations-to-failure (i.e., they are very ductile).

It is not practical to derive exact expressions for residual curvatures for complex hinge geometries and real materials (i.e., materials with non-idealized stress/strain curves). The general nature of residual curvatures and recoil of a ductile hinge may be understood by examining the moment-curvature relationship for the elastic-ideally-plastic rectangular hinge 66 shown in FIGS. 5a-c. It may be shown that the relationship between the applied moment and the resulting beam curvature is:

$$M = M_p \left[1 - \frac{1}{3} \left(\frac{\kappa}{\kappa_{yp}} \right)^2 \right] = \frac{3}{2} M_{yp} \left[1 - \frac{1}{3} \left(\frac{\kappa}{\kappa_{yp}} \right)^2 \right]$$

This function is plotted in FIG. 7. It may be seen in this plot that the applied moment M asymptotically approaches a limiting value M_p , called the plastic or ultimate moment. Beyond $11/12 M_p$ large plastic deformations occur with little additional increase in applied moment. When the applied moment is removed, the beam rebounds elastically along a line such as a-b. Thus, the elastic portion of the

-20-

total curvature approaches a limit of 3/2 the curvature at the yield point. These relations may be expressed as follows:

$$M_p = \frac{3}{2} M_{yp} \Rightarrow \kappa_{rebound} = \frac{3}{2} \kappa_{yp}$$

Imparting additional curvature in the plastic zone cannot further increase the elastic curvature, but *will* decrease the ratio of elastic to plastic curvature. Thus, additional curvature or larger expansion of the tissue supporting device will reduce the percentage recoil of the overall stent structure.

As shown in FIG. 8, when a rigid strut 28 is linked to the ductile hinge 66 described above, the strut 28 forms an angle θ with the horizontal that is a function of hinge curvature. A change in hinge curvature results in a corresponding change in this angle θ . The angular elastic rebound of the hinge is the change in angle $\Delta \theta$ that results from the rebound in elastic curvature described above, and thus angular rebound also approaches a limiting value as plastic deformation proceeds. The following expression gives the limiting value of angular elastic rebound for the idealized hinge of FIG. 8.

$$\theta_{rebound} = 3 \epsilon_{yp} \frac{L}{h}$$

Where strain at the yield point is an independent material property (yield stress divided by elastic modulus); L is the length of the ductile hinge; and h is the width of the hinge. For non-idealized ductile hinges made of real materials, the constant 3 in the above expression is replaced by a slowly rising function of total strain, but the effect of geometry would remain the same. Specifically, the elastic rebound angle of a ductile hinge decreases as the hinge width h increases, and increases as the hinge length L increases. To minimize recoil, therefore, hinge width h should be increased and length L should be decreased.

-21-

Ductile hinge width h will generally be determined by expansion force criteria, so it is important to reduce hinge length to a practical minimum in order to minimize elastic rebound. Empirical data on recoil for ductile hinges of different lengths show significantly lower recoil for shorter hinge lengths, in good agreement with the above analysis.

The ductile hinges 32 of the tissue supporting device 20 provide a second important advantage in minimizing device recoil. The embodiment of FIG. 2 shows a network of struts joined together through ductile hinges to form a cylinder. In this design, the struts 28 are initially parallel to an axis of the device. As the device is expanded, curvature is imparted to the hinges 32, and the struts 28 assume an angle θ with respect to their original orientation, as shown in FIG. 8. The total circumferential expansion of the tissue supporting device structure is a function of hinge curvature (strut angle) and strut length. Moreover, the incremental contribution to stent expansion (or recoil) for an individual strut depends on the instantaneous strut angle. Specifically, for an incremental change in strut angle $\Delta\theta$, the incremental change in circumference ΔC will depend on the strut length R and the cosine of the strut angle θ .

$$\Delta C = R \Delta\theta \cos\theta$$

Since elastic rebound of hinge curvature is nearly constant at any gross curvature, the net contribution to circumferential recoil ΔC is lower at higher strut angles θ . The final device circumference is usually specified as some fixed value, so decreasing overall strut length can increase the final strut angle θ . Total stent recoil can thus be minimized with ductile hinges by using shorter struts and higher hinge curvatures when expanded.

Empirical measurements have shown that tissue supporting device designs based on ductile hinges, such as the embodiment of FIG. 2, display superior resistance to compressive forces once expanded despite their very low expansion force. This asymmetry between compressive and expansion forces may be due to

-22-

a combination of factors including the geometry of the ductile hinge, the increased wall thickness, and increased work hardening due to higher strain levels.

According to one example of the tissue supporting device of the invention, the device can be expanded by application of an internal pressure of about 2 atmospheres or less, and once expanded to a diameter between 2 and 3 times the initial diameter can withstand a compressive force of about 16 to 20 gm/mm or greater. Examples of typical compression force values for prior art devices are 3.8 to 4.0 gm/mm.

While both recoil and crush strength properties of tissue supporting devices can be improved by use of ductile hinges with large curvatures in the expanded configuration, care must be taken not to exceed an acceptable maximum strain level for the material being used. For the ductile hinge 44 of FIG. 3b, for example, it may be shown that the maximum material strain for a given bend angle is given by the expression:

$$\epsilon_{\max} = \frac{h}{L} \frac{\theta}{2}$$

Where ϵ_{\max} is maximum strain, h is ductile hinge width, L is ductile hinge length and θ is bend angle in radians. When strain, hinge width and bend angle are determined through other criteria, this expression can be evaluated to determine the correct ductile hinge length L .

For example, suppose the ductile hinge 44 of FIG. 3b was to be fabricated of 316L stainless steel with a maximum strain of 30%; ductile hinge width h is set at 0.0025 inch (0.0635 mm) by expansion force criteria; and the bend angle θ is mechanically limited to 0.5 radians ($\approx 30^\circ$) at full stent expansion. Solving the above expression for L gives the required ductile hinge length of at least about 0.0033 inches (0.0838 mm).

Similar expressions may be developed to determine required lengths for more complicated ductile hinge geometries, such as shown in FIG. 3e. Typical values for the prismatic portions of these curved ductile hinges range from about 0.002 to about 0.0035 inches (0.051 - 0.089 mm) in hinge width and about 0.002 to about 0.006 inches (0.051 - 0.152 mm) in hinge length. The tissue supporting device design of FIGS. 4a and 4b include a stop which limits the maximum geometric deflection at the ductile hinges by the design of the angled walls 96 of the notches 94.

In many designs of the prior art, circumferential expansion was accompanied by a significant contraction of the axial length of the stent which may be up to 15% of the initial device length. Excessive axial contraction can cause a number of problems in device deployment and performance including difficulty in proper placement and tissue damage. Designs based on ductile hinges 32 can minimize the axial contraction, or foreshortening, of a tissue supporting device during expansion as follows.

FIGS. 9a and 9b illustrate an exaggerated ductile hinge 32 and shortened struts 28 in initial and expanded conditions. Each strut 28 is attached to two ductile hinges 32 at opposite ends. Each ductile hinge 32 has an instant center of rotation C_1 , C_2 that is an effective pivot point for the attached strut 28. Initially, during expansion the pivot point C_1 is displaced vertically by a distance d until C_1 is positioned even with C_2 as shown in FIG. 9b. When the array is expanded vertically, the axial struts 28 move in a circular arc with respect to the pivot points, as shown in FIG. 9b. It can be seen that the horizontal distance e between pivot points C_1 and C_2 actually increases initially, reaching a maximum e_{max} when the two points are on the same horizontal axis as shown in FIG. 9b. As the vertical expansion continues, the device compresses axially back to its original length. Only when vertical expansion of the array continues beyond the point where the horizontal distance e between C_1 and C_2 is the same as the original horizontal distance e does the overall length of the array actually begin to contract.

-24-

For the stent shown in FIG. 2, for example, approximately $\frac{1}{3}$ of the total circumferential expansion has been accomplished by the time the configuration of FIG. 9b is reached, and the stent exhibits very low axial contraction.

This ability to control axial contraction based on hinge and strut design provides great design flexibility when using ductile hinges. For example, a stent could be designed with zero axial contraction.

An alternative embodiment that illustrates the trade off between crush strength and axial contraction is shown in FIG. 10. FIG. 10 shows a portion of a tissue supporting device 70 having an array of struts 72 and ductile hinges 74 in the unexpanded state. The struts 72 are positioned initially at an angle θ_1 with respect to a longitudinal axis X of the device. As the device is expanded radially from the unexpanded state illustrated in FIG. 10, the angle θ_1 increases. In this case the device contracts axially from the onset of vertical expansion throughout the expansion. Once the device has been completely expanded the final angle θ_1 made by the strut 72 with the horizontal will be much greater than the angle θ in the device of FIG. 8a and 8b. As shown previously, a higher final strut angle θ_1 can significantly increase crush strength and decrease circumferential recoil of the stent structure. However, there is a trade off between increased crush strength and increase in axial contraction.

According to one example of the present invention, the struts 72 are positioned initially at an angle of about 0° to 45° with respect to a longitudinal axis of the device. As the device is expanded radially from the unexpanded state illustrated in FIG. 10a, the strut angle increases to about 20° to 80° .

According to one alternative embodiment of the present invention, the expandable tissue supporting device can also be used as a delivery device for certain beneficial agents including drugs, chemotherapy, or other agents. Due to the structure of the tissue supporting device incorporating ductile hinges, the widths of the struts can be substantially larger than the struts of the prior art devices. The struts due to their large size can be used for beneficial agent delivery

-25-

by providing beneficial agent on the struts or within the struts. Examples of beneficial agent delivery mechanisms include coatings on the struts, such as polymer coatings containing beneficial agents, laser drilled holes in the struts containing beneficial agent, and the like.

While the invention has been described in detail with reference to the preferred embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made and equivalents employed, without departing from the present invention.

-26-

Claims:

1. An expandable medical device comprising:
a plurality of elongated beams, the plurality of elongated beams joined together to form a substantially cylindrical device which is expandable from a cylinder having a first diameter to a cylinder having a second diameter, the plurality of elongated beams each having a beam width in a circumferential direction; and
a plurality of ductile hinges connecting the plurality of beams together in the substantially cylindrical device, the ductile hinges having a substantially constant width in a circumferential dimension along a portion of a hinge length which is at least $1/3$ a total hinge length, wherein the hinge width is smaller than the beam width such that as the device is expanded from the first diameter to the second diameter the ductile hinges experience plastic deformation while the beams are not plastically deformed.
2. The expandable medical device according to Claim 1, further comprising an abrupt transition between each of the elongated beams and each of the ductile hinges.
3. The expandable medical device according to Claim 1, further comprising a plurality of axial slots between adjacent elongated beams and a plurality of circumferential slots, wherein the plurality of ductile hinges are each formed between an axial slot and a circumferential slot.
4. The expandable medical device according to Claim 3, wherein the ductile hinges are formed at opposite ends of the circumferential slots.
5. The expandable medical device according to Claim 1, wherein the ductile hinges are each in the shape of a curved prismatic beam.

-27-

6. The expandable medical device according to Claim 5, wherein the curved prismatic beams are positioned such that during stent expansion, tensile strain is distributed along a convex surface of the curved prismatic beam.

7. The expandable medical device according to Claim 1, wherein the plurality of elongated beams are formed of wire and the plurality of ductile hinges are reduced diameter portions of the wire.

8. The expandable medical device according to Claim 1, wherein expansion of the substantially cylindrical device from the first diameter to the second diameter which is at least two times the first diameter results in substantially no axial contraction.

9. The expandable medical device according to Claim 1, further comprising a geometric deflection limiting feature for limiting an amount of bending of the ductile hinges.

10. The expandable medical device according to Claim 9, wherein the geometric deflection limiting feature is a V-shaped notch having side surfaces which contact each other when a maximum amount of bending is reached.

11. The expandable medical device according to Claim 1, wherein the plurality of elongated beams extend substantially axially and a plurality of circumferential beams are each connected at first and second ends to one of the axial beams by a ductile hinge.

12. An expandable medical device comprising:
a cylindrical tube;
a plurality of axial slots formed in the cylindrical tube in a staggered

-28-

arrangement to define a network of elongated struts, wherein each of the elongated struts are axially displaced from adjacent struts; and

a plurality of ductile hinges formed between the elongated struts, the ductile hinges allowing the cylindrical tube to be expanded or compressed from a first diameter to a second diameter by deformation of the ductile hinges, the ductile hinges being asymmetrically configured to reach a predetermined strain level upon a first percentage expansion and to reach the predetermined strain level upon a second percentage of compression, wherein the first percentage is larger than the second percentage.

13. The expandable medical device according to Claim 12, wherein the elongated struts have a substantially constant width in a circumferential direction, and the ductile hinges have a width in the circumferential direction which is less than $\frac{2}{3}$ the width of the struts.

14. The expandable medical device according to Claim 13, wherein a transition between the cross sectional area of the struts and the cross sectional area of the ductile hinges is an abrupt transition which extends less than 10 percent of a length of a strut.

15. The expandable medical device according to Claim 12, wherein the plurality of ductile hinges are curved prismatic beams having a convex side surface and a concave side surface.

16. The expandable medical device according to Claim 12, wherein a ratio of a length of the ductile hinges to a length of the axial struts is 1:6 or less.

-29-

17. The expandable medical device according to Claim 12, further comprising a geometric deflection limiting feature for limiting an amount of bending of the ductile hinges.

18. The expandable medical device according to Claim 12, wherein the ductile hinges are designed to deform plastically upon radial expansion or compression of the expandable medical device while the elongated struts experience no plastic deformation upon radial expansion or compression.

19. The expandable medical device according to Claim 12, wherein the expandable medical device is formed of Nitinol, and the ductile hinges are designed to deform upon radial expansion or compression of the expandable medical device and can be returned to an original configuration by heating.

20. The expandable medical device according to Claim 12, wherein the elongated struts include a beneficial agent for delivery to a patient.

21. An expandable medical device comprising:
a plurality of elongated beams having a substantially constant beam cross sectional area along a beam length;
a plurality of ductile hinges connecting the plurality of beams together in a substantially cylindrical device which is expandable or compressible from a first diameter to a second diameter by plastic deformation of the ductile hinges; and
a plurality of deflection limiting members positioned at a plurality of the ductile hinges to limit the deflection at the ductile hinges.

-30-

22. The expandable medical device according to Claim 21, wherein the deflection limiting members include angled side walls on opposite sides of a ductile hinge which engage one another to limit deflection at ductile hinge.

23. The expandable medical device according to Claim 22, wherein the deflection limiting members are V-shaped notches.

24. An expandable medical device which is visible in x-ray and fluoroscope images, the device comprising:
a plurality of struts arranged to form an expandable cylindrical tube;
and
a plurality of ductile hinges connecting the plurality of struts,
wherein the struts and ductile hinges have a thickness in a radial direction of the cylindrical tube of at least 0.003 inches (0.0762 mm).

25. The expandable medical device according to Claim 24, wherein the device is formed of stainless steel.

26. The expandable medical device according to Claim 24, wherein the thickness of the struts and ductile hinges is at least 0.005 inches (0.127 mm).

FIG. 1
PRIOR ART

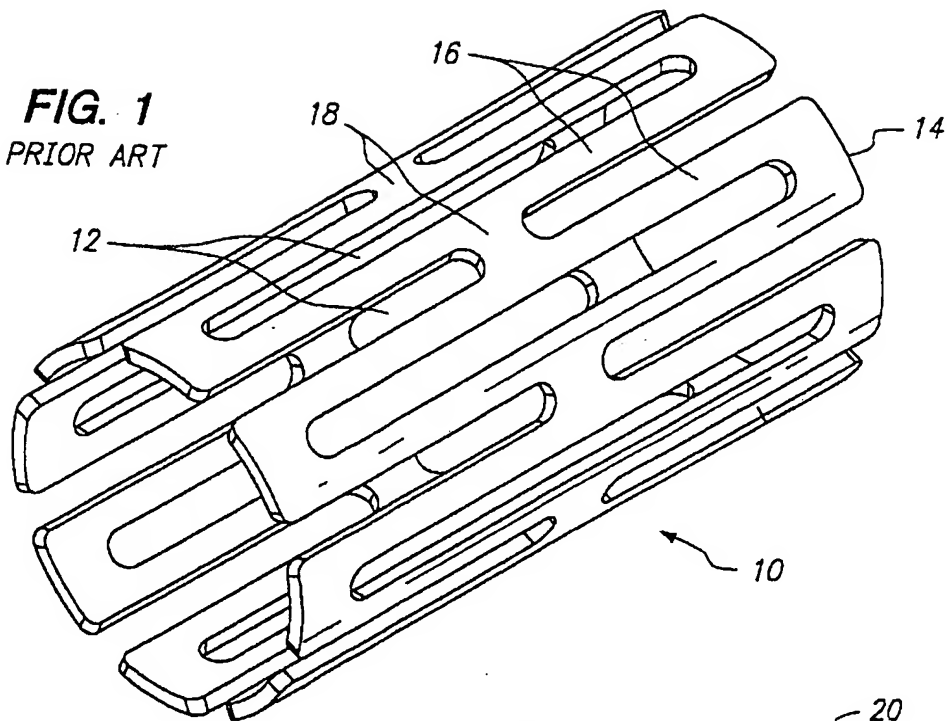
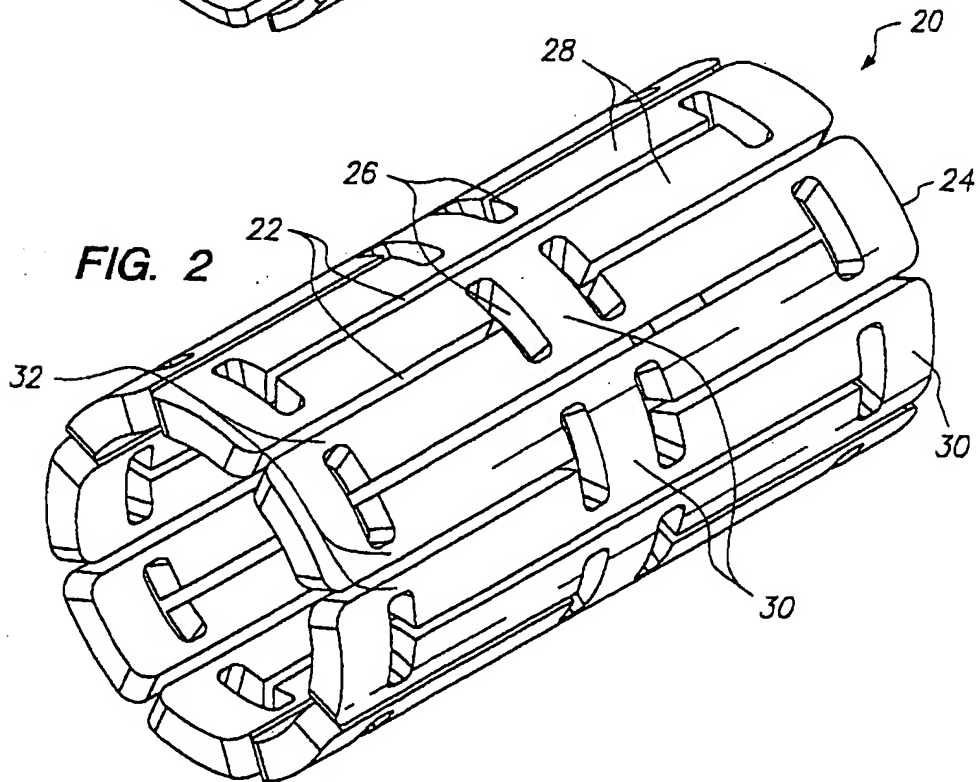


FIG. 2



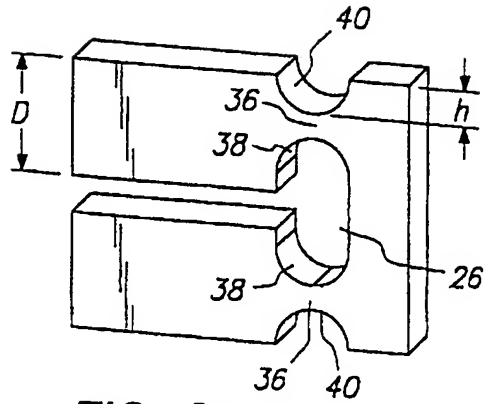


FIG. 3a

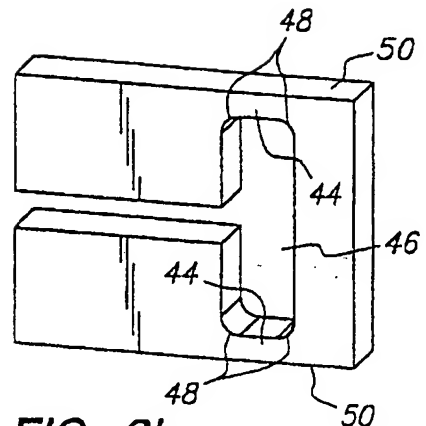


FIG. 3b

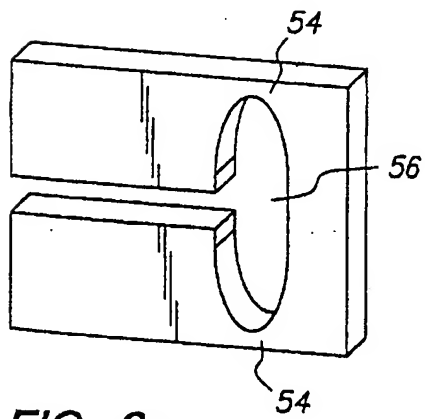


FIG. 3c

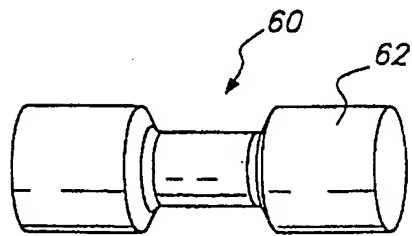


FIG. 3d

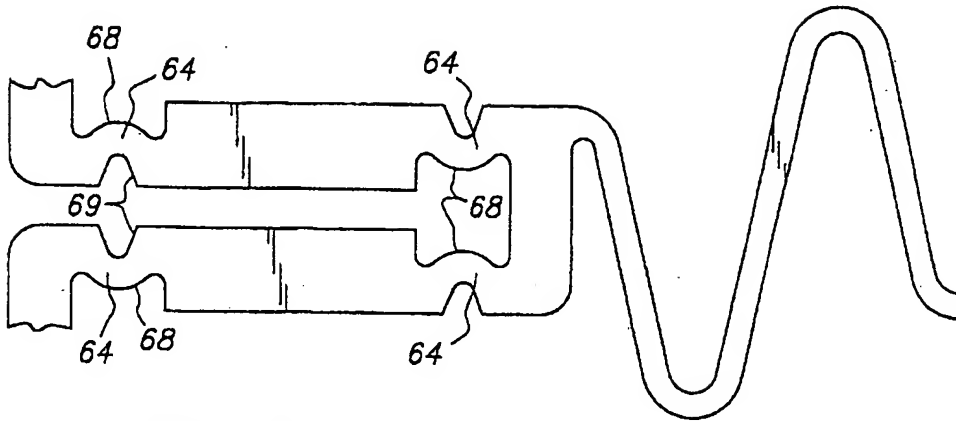


FIG. 3e

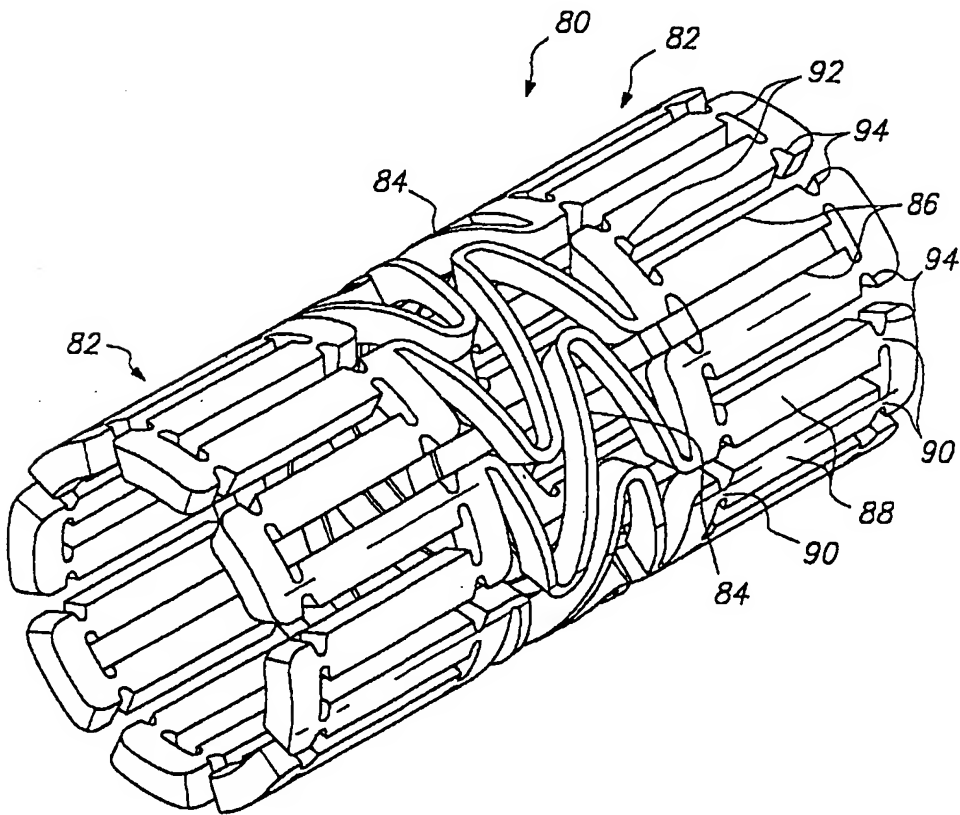


FIG. 4a

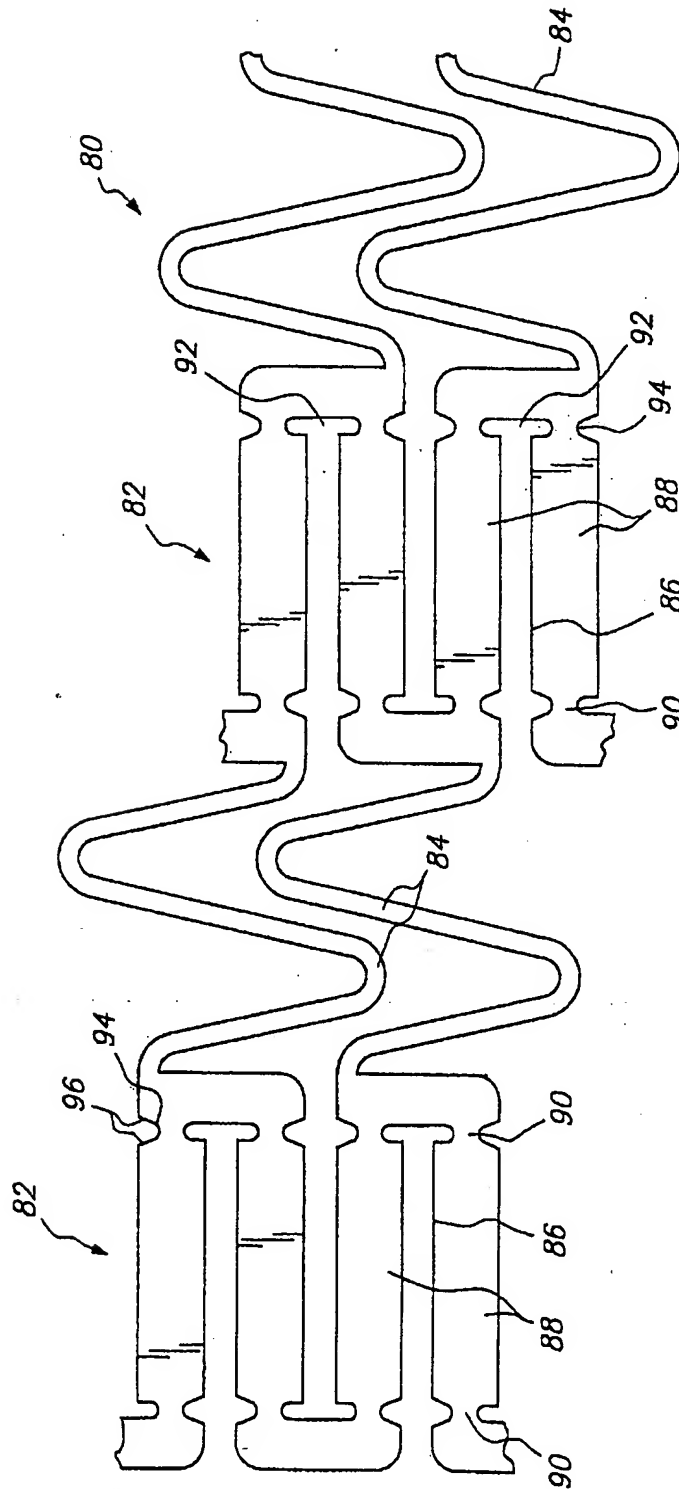


FIG. 4b

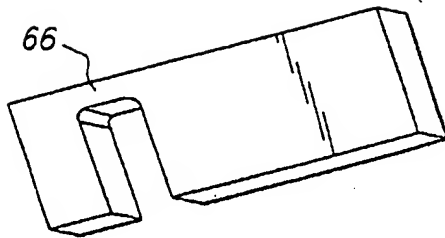


FIG. 5a

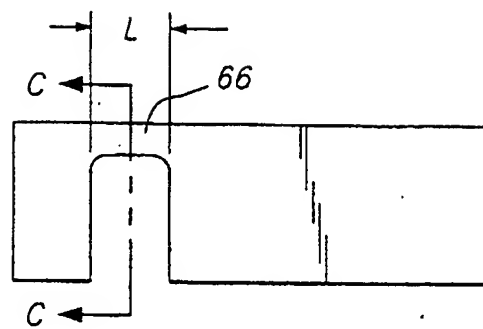


FIG. 5b




FIG. 5c

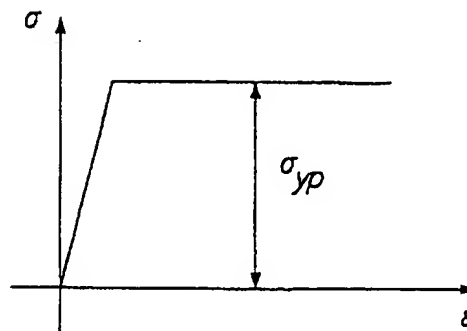


FIG. 5d

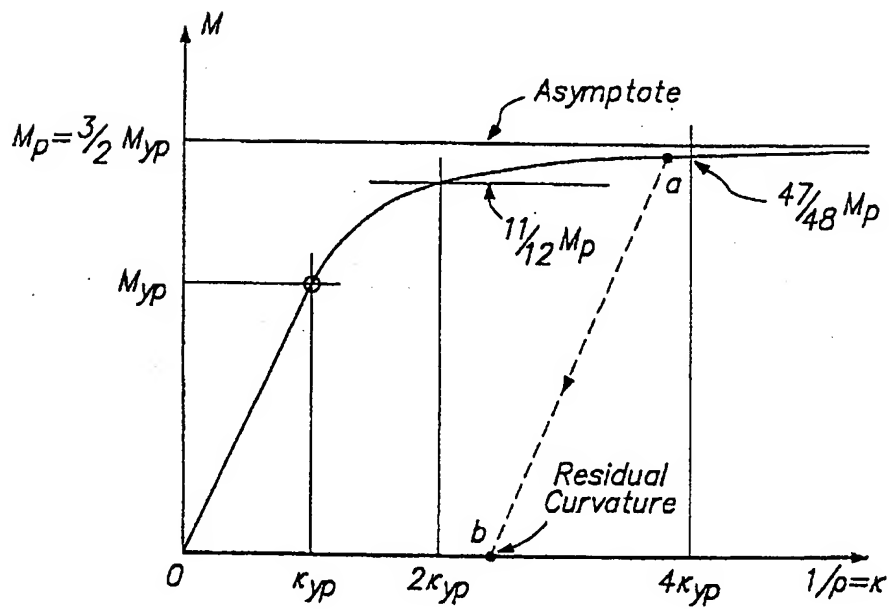
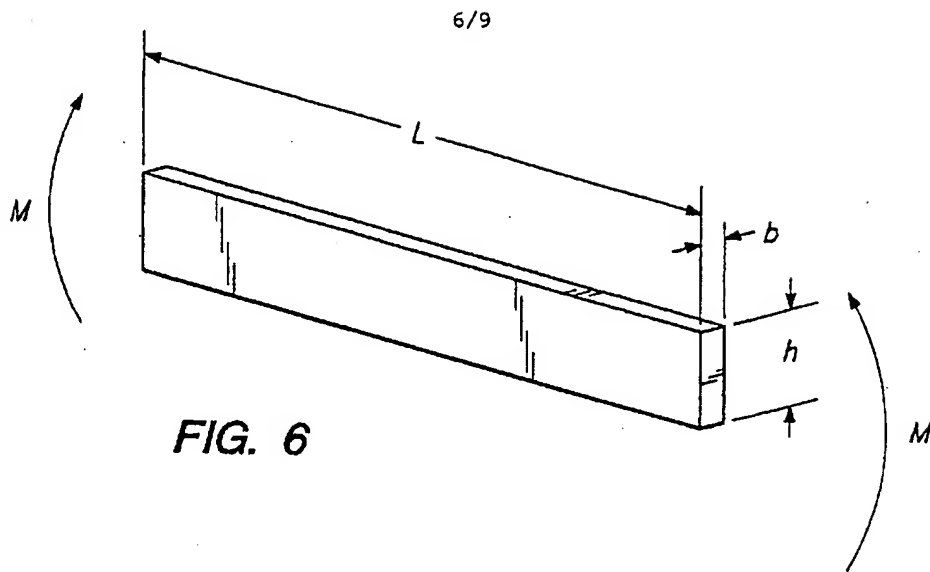


FIG. 7

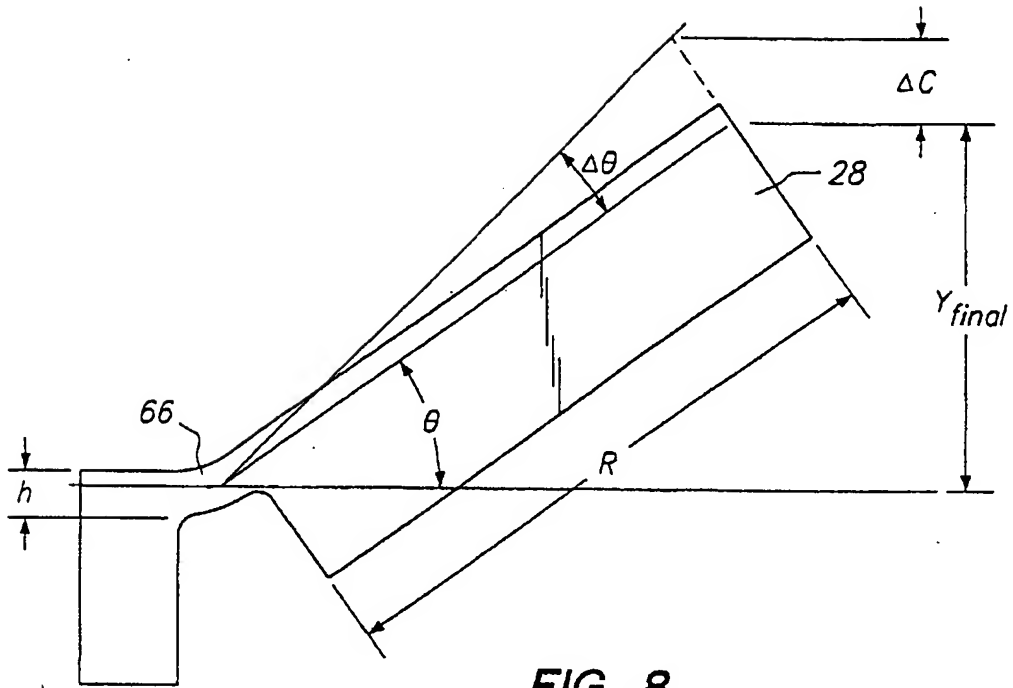


FIG. 8

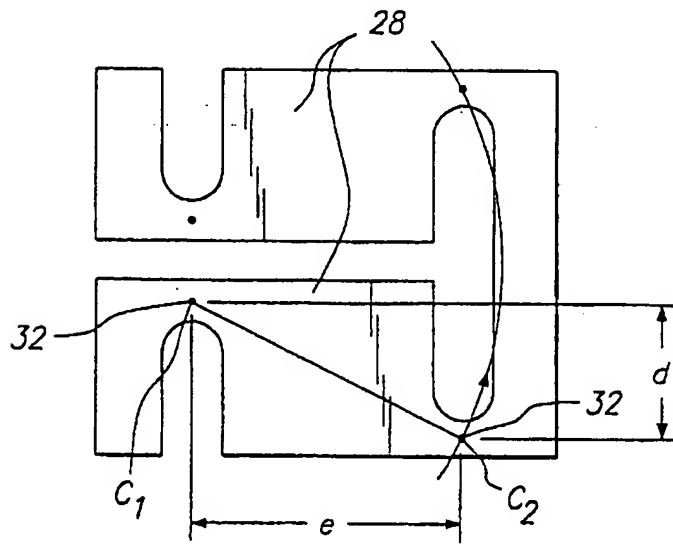
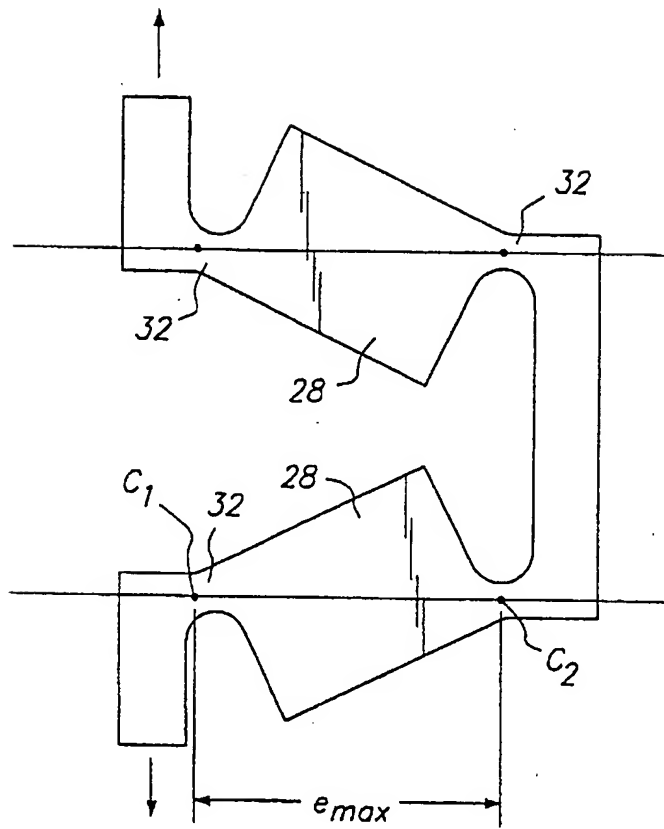


FIG. 9a

**FIG. 9b**

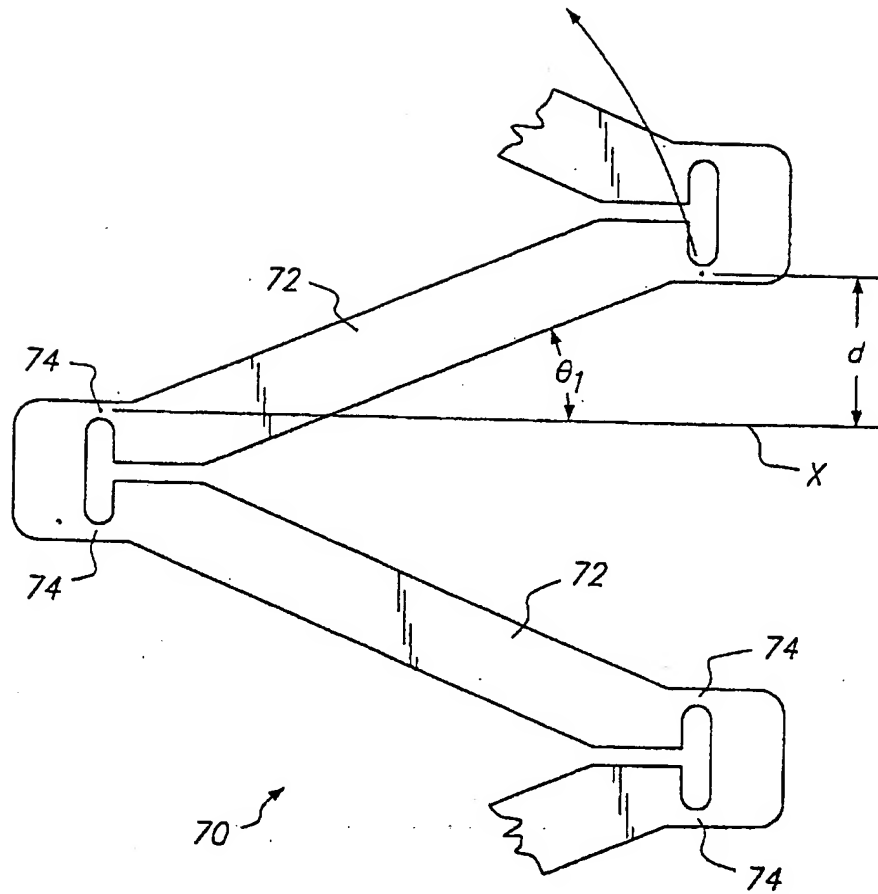


FIG. 10

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 99/06659

A. CLASSIFICATION OF SUBJECT MATTER		
A 61 M 29/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
A 61 F, A 61 M		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96/03092 A1 (BRUN) 08 February 1996, claims 1-12, fig. 1-3.	1-3, 12
A	US 5383892 A (CARDON et al.) 24 January 1995, claims 1-6, fig. 1.	1, 12
A	EP 0335341 A (EXPANABLE CRAFTS) 04 October 1989, claims 1, 17, 25, fig. 1A, 7.	1-3, 12
<input type="checkbox"/> Further documents are listed in the continuation of box C. <input type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
02 June 1999		11. 08. 1999
Name and mailing address of the ISA European Patent Office, P.O. 5818 Patentlaan 1 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax (+ 31-70) 340-3016		Authorized officer MIHATSEK e.h.

ANHANG

zum internationalen Recherchen-
bericht über die internationale
Patentmeldung Nr.

ANNEX

to the International Search
Report to the International Patent
Application No.

ANNEXE

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

PCT/US 99/06659 SAE 230056

In diesem Anhang sind die Mitglieder
der Patentfamilien der in obenge-
nannten internationalen Recherchenbericht
angeführten Patentedokumente angegeben.
Diese Angaben dienen nur zur Unter-
stützung und erfolgen ohne Gewähr.

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visée ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

In Recherchenbericht angeführtes Patentedokument in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
JO A1 9603092 08-02-1996		AT E 170733 AU A1 32706795 AU B2 7024608 EP A 9508798 EP A 2158706 EP A 2158707 EP A 2158708 EP A 2158709 EP A 2158710 EP A 2158711 EP A 2158712 EP A 2158713 EP A 2158714 EP A 2158715 EP A 2158716 EP A 2158717 EP A 2158718 EP A 2158719 EP A 2158720 EP A 2158721 EP A 2158722 EP A 2158723 EP A 2158724 EP A 2158725 EP A 2158726 EP A 2158727 EP A 2158728 EP A 2158729 EP A 2158730 EP A 2158731 EP A 2158732 EP A 2158733 EP A 2158734 EP A 2158735 EP A 2158736 EP A 2158737 EP A 2158738 EP A 2158739 EP A 2158740 EP A 2158741 EP A 2158742 EP A 2158743 EP A 2158744 EP A 2158745 EP A 2158746 EP A 2158747 EP A 2158748 EP A 2158749 EP A 2158750 EP A 2158751 EP A 2158752 EP A 2158753 EP A 2158754 EP A 2158755 EP A 2158756 EP A 2158757 EP A 2158758 EP A 2158759 EP A 2158760 EP A 2158761 EP A 2158762 EP A 2158763 EP A 2158764 EP A 2158765 EP A 2158766 EP A 2158767 EP A 2158768 EP A 2158769 EP A 2158770 EP A 2158771 EP A 2158772 EP A 2158773 EP A 2158774 EP A 2158775 EP A 2158776 EP A 2158777 EP A 2158778 EP A 2158779 EP A 2158780 EP A 2158781 EP A 2158782 EP A 2158783 EP A 2158784 EP A 2158785 EP A 2158786 EP A 2158787 EP A 2158788 EP A 2158789 EP A 2158790 EP A 2158791 EP A 2158792 EP A 2158793 EP A 2158794 EP A 2158795 EP A 2158796 EP A 2158797 EP A 2158798 EP A 2158799 EP A 2158800 EP A 2158801 EP A 2158802 EP A 2158803 EP A 2158804 EP A 2158805 EP A 2158806 EP A 2158807 EP A 2158808 EP A 2158809 EP A 2158810 EP A 2158811 EP A 2158812 EP A 2158813 EP A 2158814 EP A 2158815 EP A 2158816 EP A 2158817 EP A 2158818 EP A 2158819 EP A 2158820 EP A 2158821 EP A 2158822 EP A 2158823 EP A 2158824 EP A 2158825 EP A 2158826 EP A 2158827 EP A 2158828 EP A 2158829 EP A 2158830 EP A 2158831 EP A 2158832 EP A 2158833 EP A 2158834 EP A 2158835 EP A 2158836 EP A 2158837 EP A 2158838 EP A 2158839 EP A 2158840 EP A 2158841 EP A 2158842 EP A 2158843 EP A 2158844 EP A 2158845 EP A 2158846 EP A 2158847 EP A 2158848 EP A 2158849 EP A 2158850 EP A 2158851 EP A 2158852 EP A 2158853 EP A 2158854 EP A 2158855 EP A 2158856 EP A 2158857 EP A 2158858 EP A 2158859 EP A 2158860 EP A 2158861 EP A 2158862 EP A 2158863 EP A 2158864 EP A 2158865 EP A 2158866 EP A 2158867 EP A 2158868 EP A 2158869 EP A 2158870 EP A 2158871 EP A 2158872 EP A 2158873 EP A 2158874 EP A 2158875 EP A 2158876 EP A 2158877 EP A 2158878 EP A 2158879 EP A 2158880 EP A 2158881 EP A 2158882 EP A 2158883 EP A 2158884 EP A 2158885 EP A 2158886 EP A 2158887 EP A 2158888 EP A 2158889 EP A 2158890 EP A 2158891 EP A 2158892 EP A 2158893 EP A 2158894 EP A 2158895 EP A 2158896 EP A 2158897 EP A 2158898 EP A 2158899 EP A 2158900 EP A 2158901 EP A 2158902 EP A 2158903 EP A 2158904 EP A 2158905 EP A 2158906 EP A 2158907 EP A 2158908 EP A 2158909 EP A 2158910 EP A 2158911 EP A 2158912 EP A 2158913 EP A 2158914 EP A 2158915 EP A 2158916 EP A 2158917 EP A 2158918 EP A 2158919 EP A 2158920 EP A 2158921 EP A 2158922 EP A 2158923 EP A 2158924 EP A 2158925 EP A 2158926 EP A 2158927 EP A 2158928 EP A 2158929 EP A 2158930 EP A 2158931 EP A 2158932 EP A 2158933 EP A 2158934 EP A 2158935 EP A 2158936 EP A 2158937 EP A 2158938 EP A 2158939 EP A 2158940 EP A 2158941 EP A 2158942 EP A 2158943 EP A 2158944 EP A 2158945 EP A 2158946 EP A 2158947 EP A 2158948 EP A 2158949 EP A 2158950 EP A 2158951 EP A 2158952 EP A 2158953 EP A 2158954 EP A 2158955 EP A 2158956 EP A 2158957 EP A 2158958 EP A 2158959 EP A 2158960 EP A 2158961 EP A 2158962 EP A 2158963 EP A 2158964 EP A 2158965 EP A 2158966 EP A 2158967 EP A 2158968 EP A 2158969 EP A 2158970 EP A 2158971 EP A 2158972 EP A 2158973 EP A 2158974 EP A 2158975 EP A 2158976 EP A 2158977 EP A 2158978 EP A 2158979 EP A 2158980 EP A 2158981 EP A 2158982 EP A 2158983 EP A 2158984 EP A 2158985 EP A 2158986 EP A 2158987 EP A 2158988 EP A 2158989 EP A 2158990 EP A 2158991 EP A 2158992 EP A 2158993 EP A 2158994 EP A 2158995 EP A 2158996 EP A 2158997 EP A 2158998 EP A 2158999 EP A 2159000 EP A 2159001 EP A 2159002 EP A 2159003 EP A 2159004 EP A 2159005 EP A 2159006 EP A 2159007 EP A 2159008 EP A 2159009 EP A 2159010 EP A 2159011 EP A 2159012 EP A 2159013 EP A 2159014 EP A 2159015 EP A 2159016 EP A 2159017 EP A 2159018 EP A 2159019 EP A 2159020 EP A 2159021 EP A 2159022 EP A 2159023 EP A 2159024 EP A 2159025 EP A 2159026 EP A 2159027 EP A 2159028 EP A 2159029 EP A 2159030 EP A 2159031 EP A 2159032 EP A 2159033 EP A 2159034 EP A 2159035 EP A 2159036 EP A 2159037 EP A 2159038 EP A 2159039 EP A 2159040 EP A 2159041 EP A 2159042 EP A 2159043 EP A 2159044 EP A 2159045 EP A 2159046 EP A 2159047 EP A 2159048 EP A 2159049 EP A 2159050 EP A 2159051 EP A 2159052 EP A 2159053 EP A 2159054 EP A 2159055 EP A 2159056 EP A 2159057 EP A 2159058 EP A 2159059 EP A 2159060 EP A 2159061 EP A 2159062 EP A 2159063 EP A 2159064 EP A 2159065 EP A 2159066 EP A 2159067 EP A 2159068 EP A 2159069 EP A 2159070 EP A 2159071 EP A 2159072 EP A 2159073 EP A 2159074 EP A 2159075 EP A 2159076 EP A 2159077 EP A 2159078 EP A 2159079 EP A 2159080 EP A 2159081 EP A 2159082 EP A 2159083 EP A 2159084 EP A 2159085 EP A 2159086 EP A 2159087 EP A 2159088 EP A 2159089 EP A 2159090 EP A 2159091 EP A 2159092 EP A 2159093 EP A 2159094 EP A 2159095 EP A 2159096 EP A 2159097 EP A 2159098 EP A 2159099 EP A 2159100 EP A 2159101 EP A 2159102 EP A 2159103 EP A 2159104 EP A 2159105 EP A 2159106 EP A 2159107 EP A 2159108 EP A 2159109 EP A 2159110 EP A 2159111 EP A 2159112 EP A 2159113 EP A 2159114 EP A 2159115 EP A 2159116 EP A 2159117 EP A 2159118 EP A 2159119 EP A 2159120 EP A 2159121 EP A 2159122 EP A 2159123 EP A 2159124 EP A 2159125 EP A 2159126 EP A 2159127 EP A 2159128 EP A 2159129 EP A 2159130 EP A 2159131 EP A 2159132 EP A 2159133 EP A 2159134 EP A 2159135 EP A 2159136 EP A 2159137 EP A 2159138 EP A 2159139 EP A 2159140 EP A 2159141 EP A 2159142 EP A 2159143 EP A 2159144 EP A 2159145 EP A 2159146 EP A 2159147 EP A 2159148 EP A 2159149 EP A 2159150 EP A 2159151 EP A 2159152 EP A 2159153 EP A 2159154 EP A 2159155 EP A 2159156 EP A 2159157 EP A 2159158 EP A 2159159 EP A 2159160 EP A 2159161 EP A 2159162 EP A 2159163 EP A 2159164 EP A 2159165 EP A 2159166 EP A 2159167 EP A 2159168 EP A 2159169 EP A 2159170 EP A 2159171 EP A 2159172 EP A 2159173 EP A 2159174 EP A 2159175 EP A 2159176 EP A 2159177 EP A 2159178 EP A 2159179 EP A 2159180 EP A 2159181 EP A 2159182 EP A 2159183 EP A 2159184 EP A 2159185 EP A 2159186 EP A 2159187 EP A 2159188 EP A 2159189 EP A 2159190 EP A 2159191 EP A 2159192 EP A 2159193 EP A 2159194 EP A 2159195 EP A 2159196 EP A 2159197 EP A 2159198 EP A 2159199 EP A 2159200 EP A 2159201 EP A 2159202 EP A 2159203 EP A 2159204 EP A 2159205 EP A 2159206 EP A 2159207 EP A 2159208 EP A 2159209 EP A 2159210 EP A 2159211 EP A 2159212 EP A 2159213 EP A 2159214 EP A 2159215 EP A 2159216 EP A 2159217 EP A 2159218 EP A 2159219 EP A 2159220 EP A 2159221 EP A 2159222 EP A 2159223 EP A 2159224 EP A 2159225 EP A 2159226 EP A 2159227 EP A 2159228 EP A 2159229 EP A 2159230 EP A 2159231 EP A 2159232 EP A 2159233 EP A 2159234 EP A 2159235 EP A 2159236 EP A 2159237 EP A 2159238 EP A 2159239 EP A 2159240 EP A 2159241 EP A 2159242 EP A 2159243 EP A 2159244 EP A 2159245 EP A 2159246 EP A 2159247 EP A 2159248 EP A 2159249 EP A 2159250 EP A 2159251 EP A 2159252 EP A 2159253 EP A 2159254 EP A 2159255 EP A 2159256 EP A 2159257 EP A 2159258 EP A 2159259 EP A 2159260 EP A 2159261 EP A 2159262 EP A 2159263 EP A 2159264 EP A 2159265 EP A 2159266 EP A 2159267 EP A 2159268 EP A 2159269 EP A 2159270 EP A 2159271 EP A 2159272 EP A 2159273 EP A 2159274 EP A 2159275 EP A 2159276 EP A 2159277 EP A 2159278 EP A 2159279 EP A 2159280 EP A 2159281 EP A 2159282 EP A 2159283 EP A 2159284 EP A 2159285 EP A 2159286 EP A 2159287 EP A 2159288 EP A 2159289 EP A 2159290 EP A 2159291 EP A 2159292 EP A 2159293 EP A 2159294 EP A 2159295 EP A 2159296 EP A 2159297 EP A 2159298 EP A 2159299 EP A 2159300 EP A 2159301 EP A 2159302 EP A 2159303 EP A 2159304 EP A 2159305 EP A 2159306 EP A 2159307 EP A 2159308 EP A 2159309 EP A 2159310 EP A 2159311 EP A 2159312 EP A 2159313 EP A 2159314 EP A 2159315 EP A 2159316 EP A 2159317 EP A 2159318 EP A 2159319 EP A 2159320 EP A 2159321 EP A 2159322 EP A 2159323 EP A 2159324 EP A 2159325 EP A 2159326 EP A 2159327 EP A 2159328 EP A 2159329 EP A 2159330 EP A 2159331 EP A 2159332 EP A 2159333 EP A 2159334 EP A 2159335 EP A 2159336 EP A 2159337 EP A 2159338 EP A 2159339 EP A 2159340 EP A 2159341 EP A 2159342 EP A 2159343 EP A 2159344 EP A 2159345 EP A 2159346 EP A 2159347 EP A 2159348 EP A 2159349 EP A 2159350 EP A 2159351 EP A 2159352 EP A 2159353 EP A 2159354 EP A 2159355 EP A 2159356 EP A 2159357 EP A 2159358 EP A 2159359 EP A 2159360 EP A 2159361 EP A 2159362 EP A 2159363 EP A 2159364 EP A 2159365 EP A 2159366 EP A 2159367 EP A 2159368 EP A 2159369 EP A 2159370 EP A 2159371 EP A 2159372 EP A 2159373 EP A 2159374 EP A 2159375 EP A 2159376 EP A 2159377 EP A 2159378 EP A 2159379 EP A 2159380 EP A 2159381 EP A 2159382 EP A 2159383 EP A 2159384 EP A 2159385 EP A 2159386 EP A 2159387 EP A 2159388 EP A 2159389 EP A 2159390 EP A 2159391 EP A 2159392 EP A 2159393 EP A 2159394 EP A 2159395 EP A 2159396 EP A 2159397 EP A 2159398 EP A 2159399 EP A 2159400 EP A 2159401 EP A 2159402 EP A 2159403 EP A 2159404 EP A 2159405 EP A 2159406 EP A 2159407 EP A 2159408 EP A 2159409 EP A 2159410 EP A 2159411 EP A 2159412 EP A 2159413 EP A 2159414 EP A 2159415 EP A 2159416 EP A 2159417 EP A 2159418 EP A 2159419 EP A 2159420 EP A 2159421 EP A 2159422 EP A 2159423 EP A 2159424 EP A 2159425 EP A 2159426 EP A 2159427 EP A 2159428 EP A 2159429 EP A 2159430 EP A 2159431 EP A 2159432 EP A 2159433 EP A 2159434 EP A 2159435 EP A 2159436 EP A 2159437 EP A 2159438 EP A 2159439 EP A 2159440 EP A 2159441 EP A 2159442 EP A 2159443 EP A 2159444 EP A 2159445 EP A 2159446 EP A 2159447 EP A 2159448 EP A 2159449 EP A 2159450 EP A 2159451 EP A 2159452 EP A 2159453 EP A 2159454 EP A 2159455 EP A 2159456 EP A 2159457 EP A 2159458 EP A 2159459 EP A 2159460 EP A 2159461 EP A 2159462 EP A 2159463 EP A 2159464 EP A 2159465 EP A 2159466 EP A 2159467 EP A 2159468 EP A 2159469 EP A 2159470 EP A 2159471 EP A 2159472 EP A 2159473 EP A 2159474 EP A 2159475 EP A 2159476 EP A 2159477 EP A 2159478 EP A 2159479 EP A 2159480 EP A 2159481 EP A 2159482 EP A 2159483 EP A 2159484 EP A 2159485 EP A 2159486 EP A 2159487 EP A 2159488 EP A 2159489 EP A 2159490 EP A 2159491 EP A 2159492 EP A 2159493 EP A 2159494 EP A 2159495 EP A 2159496 EP A 2159497 EP A 2159498 EP A 2159499 EP A 2159500 EP A 2159501 EP A 2159502 EP A 2159503 EP A 2159504 EP A 2159505 EP A 2159506 EP A 2159507 EP A 2159508 EP A 2159509 EP A 2159510 EP A 2159511 EP A 2159512 EP A 2159513 EP A 2159514 EP A 2159515 EP A 2159516 EP A 2159517 EP A 2159518 EP A 2159519 EP A 2159520 EP A 2159521 EP A 2159522 EP A 2159523 EP A 2159524 EP A 2159525 EP A 2159526 EP A 2159527	
S A 5363892 24-01-1995		AT E 133354 DE A 2082367 DE B2 69208026 DE T2 69208026 DE T3 69208026 EP A 9541443 EP A 9541444 EP A 9541445 EP A 9541446 EP A 9541447 EP A 9541448 EP A 9541449 EP A 9541450 EP A 9541451 EP A 9541452 EP A 9541453 EP A 9541454 EP A 9541455 EP A 9541456 EP A 9541457 EP A 9541458 EP A 9541459 EP A 9541460 EP A 9541461 EP A 9541462 EP A 9541463 EP A 9541464 EP A 9541465 EP A 9541466 EP A 9541467 EP A 9541468 EP A 9541469 EP A 9541470 EP A 9541471 EP A 9541472 EP A 9541473 EP A 9541474 EP A 9541475 EP A 9541476 EP A 9541477 EP A 9541478 EP A 9541479 EP A 9541480 EP A 9541481 EP A 9541482 EP A 9541483 EP A 9541484 EP A 9541485 EP A 9541486 EP A 9541487 EP A 9541488 EP A 9541489 EP A 9541490 EP A 9541491 EP A 9541492 EP A 9541493 EP A 9541494 EP A 9541495 EP A 9541496 EP A 9541497 EP A 9541498 EP A 9541499 EP A 9541500 EP A 9541501 EP A 9541502 EP A 9541503 EP A 9541504 EP A 9541505 EP A 9541506 EP A 9541507 EP A 9541508 EP A 9541509 EP A 9541510 EP A 9541511 EP A 9541512 EP A 9541513 EP A 9541514 EP A 9541515 EP A 9541516 EP A 9541517 EP A 9541518 EP A 9541519 EP A 9541520 EP A 9541521 EP A 9541522 EP A 9541523 EP A 9541524 EP A 9541525 EP A 9541526 EP A 9541527 EP A 9541528 EP A 9541529 EP A 9541530 EP A 9541531 EP A 9541532 EP A 9541533 EP A 9541534 EP A 9541535 EP A 9541536 EP A 9541537 EP A 9541538 EP A 9541539 EP A 9541540 EP A 9541541 EP A 9541542 EP A 9541543 EP A 9541544 EP A 9541545 EP A 9541546 EP A 9541547 EP A 9541548 EP A 9541549 EP A 9541550 EP A 9541551 EP A 9541552 EP A 9541553 EP A 9541554 EP A 9541555 EP A 9541556 EP A 9541557 EP A 9541558 EP A 9541559 EP A 9541560 EP A 9541561 EP A 9541562 EP A 9541563 EP A 9541564 EP A 9541565 EP A 9541566 EP A 9541567 EP A 9541568 EP A 9541569 EP A 9541570 EP A 9541571 EP A 9541572 EP A 9541573 EP A 9541574 EP A 9541575 EP A 9541576 EP A 9541577 EP A 9541578 EP A 9541579 EP A 9541580 EP A 9541581 EP A 9541582 EP A 9541583 EP A 9541584 EP A 9541585 EP A 9541586 EP A 9541587 EP A 9541588 EP A 9541589 EP A 9541590 EP A 9541591 EP A 9541592 EP A 9541593 EP A 9541594 EP A 9541595 EP A 9541596 EP A 9541597 EP A 9541598 EP A 9541599 EP A 9541600 EP A 9	

CA	A1	1330186	14-06-1994
DE	B1	68900893	09-04-1993
EP	B1	335341	04-03-1993
GR	T1	2030230	04-10-1993
JP	A1	3003986	06-03-1993
JP	A1	1299550	04-12-1993
KRR	B1	9711350	10-07-1997
KRR	B1	9711351	10-07-1997
KRR	B1	9711352	10-07-1997
ZA	A	8902287	27-12-1989
AT	E	60500	15-02-1991
AU	A1	64882786	14-03-1987
AU	B2	591942	21-12-1989
BR	A	8605658	15-12-1987
CA	A1	1281504	19-04-1991
CA	A1	1291505	19-03-1991
CA	B1	1338303	07-03-1996
DE	C0	3677321	07-03-1991
EP	A2	221570	13-05-1987
EP	TD	221570	17-12-1987
EP	A3	221570	23-12-1987
EP	B1	221570	30-01-1991
GR	T1	3001410	25-09-1992
JP	A2	62231657	12-10-1987
JP	A4	4006377	05-03-1993
JP	A3	4357949	10-12-1993
JP	A2	9276302	28-10-1997
JP	B2	2731642	25-03-1998
US	A	4733665	29-03-1988
US	B1	4733665	11-01-1994
ZA	A	8608414	30-09-1987
US	A	4739762	26-04-1988
US	A	4776337	11-10-1988
US	B1	4739762	27-10-1998

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.